




LAVA (DALIAN) INTERNATIONAL TRADE CO.,LTD

No.155,Shandong Road,Dalian,China.116031. Tel/Fax:(86)0411-39563205,Cell:(86)13322231605

Website: www.lavadl.com Mail to: info@lavadl.com

镁质矿产品系列 Series of Magnesite Ores

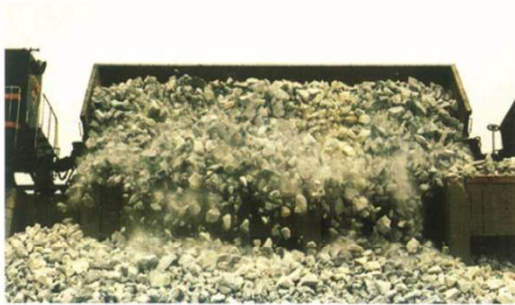

菱镁石 Magnesite Ore

分类 kind	牌号 brand	化学成份 (%) chemical composition				用途 usage	粒度 grain size (mm)
		MgO≥	SiO ₂ ≤	CaO≤	Fe ₂ O ₃ ≤		
菱镁石 magnesite ore	M-47C	47	0.6	0.6	0.3	普通电熔砂 common electro- fused magnesite 重烧镁砂 dead-burned magnesite	0-5
	M-46	46	1.2	0.8	0.4		
	M-45	45	1.5	1.5			
	M-41	41	2.0	6.0			
特种菱镁石 special magnesite ore	M-47B	47	0.4	0.6	0.3	C/S≥2电熔砂用矿石 electro-fused ore	0-25
	M-47A	47	0.3	0.6	0.28	电热电熔镁砂用矿石 electro-fused magnesite ore	0-40 5-25
白云石 dolomite ore	NBYS22A	22	2.0	≥10		镁钙砂 magnesite cao	25-100 50-180
	NBYS22B	22	2.0	≥6			
	NBYS20A	20	1.0	≥28		白云石砂 dolomite grain	
	NBYS20B	20	1.5	≥26			



LAVA (DALIAN) INTERNATIONAL TRADE CO.,LTD

No.155,Shandong Road,Dalian,China.116031. Tel/Fax:(86)0411-39563205,Cell:(86)13322231605

Website: www.lavadl.com Mail to: info@lavadl.com



镁铁砂，高铁高钙砂，镁铝尖晶石砂，镁白云石砂。各种合成尖晶石砂均以优质菱镁石、白云石为原料，以铁粉、铝矾土、工业氧化铝粉等加入物成球后高温烧成。

High Iron Synthetic Magnesite, High Iron and High CaO Magnesite, Magnesite Alumina Spinel, Magnesite Chrome Spinel. All kinds of synthetic magnesite and spinel are made from high quality magnesite ore and dolomite ore, by briquetting and sintering at high temperature together with iron power, chrome ore powder and bauxite as additives, respectively.

合成镁砂 Synthetic Magnesite

指标 index 牌号 brand	化学成份 (%) chemical composition					物理指标 physical index B.D (g/cm ³)
	MgO	Al ₂ O ₃	SiO ₂	CaO	Fe ₂ O ₃	
MTS-68Aa	68-80		≤2.5	≤9.0	≥10.0	
MTS-68Ab	68-80		≤3.0		≥10.0	
MTS-68Ac	68-80		≤5.0		≥10.0	
MTS-83A	≥83		≤1.0	7-8	6-8	
MTS-83B	≥83		≤1.2	7-9	6-8	
MTS-83C	≥83		≤1.5	7-9	6-8	
MAS	28-32	60-63	5-8	1.2		3.20
MCa-32	63-65		≤1.0	31-33	≤3.0	3.30
MCa-25	72-74		≤1.0	23-25	≤1.0	3.30



LAVA (DALIAN) INTERNATIONAL TRADE CO.,LTD

No.155,Shandong Road,Dalian,China.116031. Tel/Fax:(86)0411-39563205,Cell:(86)13322231605
Website: www.lavadl.com Mail to: info@lavadl.com



轻烧镁 Caustic Calcined Magnesite

牌号 brand	化学成份(%) chemical composition				
	MgO \geq	SiO ₂ \leq	CaO \leq	Fe ₂ O ₃ \leq	灼烧减量,LOI \leq
CBM96	96.0	0.5	-	0.6	2.0
CBM95A	95.0	0.8	1.0	-	3.0
CBM95B	95.0	1.0	1.5	-	3.0
CBM94A	94.0	1.5	1.5	-	4.0
CBM94B	94.0	2.0	2.0	-	4.0
CBM92	92.0	3.0	2.0	-	5.0
CBM90	90.0	4.0	2.5	-	6.0
CBM85	85.0	6.0	4.0	-	8.0
CBM80	80.0	8.0	6.0	-	10.0
CBM75	75.0	10.0	8.0	-	12.0




LAVA (DALIAN) INTERNATIONAL TRADE CO.,LTD

No.155,Shandong Road,Dalian,China.116031. Tel/Fax:(86)0411-39563205,Cell:(86)13322231605

Website: www.lavadl.com Mail to: info@lavadl.com



电熔镁砂
Electro-fused Magnesite

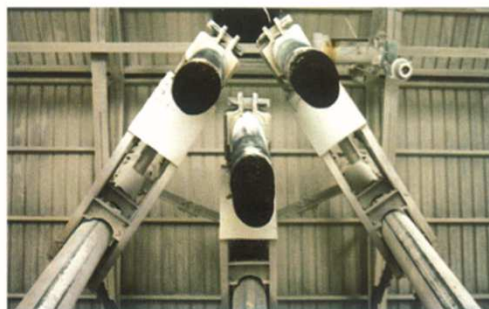

电熔镁砂 Electro-fused Magnesite

牌号 brand	指标 index	化学成份 (%) chemical composition					粒度 grain size (mm)	
		MgO(≥)	SiO ₂ (≤)	Fe ₂ O ₃ (≤)	CaO≤	Al ₂ O ₃ (≤)		B.Dg/cm ³ (≥)
FM-980		98.0	0.6	0.6	1.2	0.2	3.50	0-10 0-50 0-120
FM-975		97.5	1.0	0.7	1.4	0.2	3.45	
FM-970		97.0	1.5	0.8	1.5	0.3	3.45	
FM-960		96.0	2.2	0.9	2.0	0.3	3.35	

特种电熔镁砂 Special Electro-fused Magnesite

牌号 brand	指标 index	化学成份 (%) chemical composition				
		MgO(≥)	SiO ₂ (≤)	Fe ₂ O ₃ (≤)	B.Dg/cm ³ (≥)	C/S(≥)
FM-980		98.0	0.5	0.5	3.50	2
FM-975		97.5	0.6	0.6	3.50	2
FM-970		97.0	0.6	0.6	3.45	2
FM-960		96.0	0.9	0.9	3.35	2